

QuPanel 5G/LTE MIMO 4x4

Directional High Power multiband 5G/LTE MIMO 4x4 antenna

QuPanel 5G/LTE directional MIMO 4x4 high gain antenna is predicted for 5G and 4G LTE mainly, but is compatible with 3G and 2G as well. The antenna improves the signal in rural/suburban and locations where the mobile signal is weak. That antenna is predicted to be installed on the buildings (on the pole or on the wall). Due to very wide working frequency range, the antenna is universal client for 5G bands n77, n78 and LTE bands like LTE700 / 800 / 1800 / 1900 / 2100 / 2300 / 2600 / 3400 / 3800. It's compatible with Teltonika and other MIMO 4x4 5G / LTE / 3G / 2G modems and routers.

Check out the new, [ultra wide 5G Global antenna](#).

5G**4x4 MIMO****694-3800MHz****7 dBi****DIRECTIONAL****IP 67****-40° TO +80°**

OUTDOOR ANTENNA WORKS IN ANY WEATHER CONDITIONS, IP67



MOUNTING SYSTEM WITH TWO PLANES, 60 DEGREES REGULATION



FOUR SMA CONNECTORS



7.5 DBI GAIN



70° BEAMWIDTH



MADE IN EUROPE



5G / LTE ANTENNA SPECIFICATION

FREQUENCY	694 - 960 MHz 1.7 - 2.2 GHz 2.2 - 2.7 GHz 3.3 - 3.8 GHz
GAIN	694 - 960 MHz : 7 dBi 1.7 - 2.2 GHz : 7 dBi 2.2 - 2.7 GHz : 7.5 dBi 3.3 - 3.8 GHz : 5.5 dBi
SUPPORTED LTE BANDS	1, 2, 3, 4, 5, 7, 8, 9, 10, 12, 13, 14, 17, 18, 19, 20, 22, 25, 26, 27, 28, 29, 30, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 48, 49, 52, 53, 65, 66, 67, 68, 69, 85, 103, 106
SUPPORTED 5G BANDS	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n34, n38, n39, n40, n41, n48, n53, n65, n66, n67, n78, n80, n81, n82, n83, n84, n85, n86, n89, n90, n95, n97, n98, n100, n101, n256
VSWR	<1.70, max <2.00
BEAMWIDTH	70°/70° ±15°
POLARIZATION	Dual polarized X-Pol
IMPEDANCE	50 Ω
FRONT-TO-BACK	694 - 960 MHz : >10 dB 1.7 - 2.2 GHz : >12 dB 2.2 - 2.7 GHz : >14 dB 3.3 - 3.8 GHz : >17 dB

MECHANICAL SPECIFICATION

MATERIALS	ABS, aluminum, PTFE, Fiberglass
CONNECTOR TYPE	4x SMA plug
INGRESS PROTECTION	IP67
DIMENSIONS	392 x 392 x 99 mm 15.43 x 15.43 x 3.90 inch
WEIGHT	3.7 kg 8.16 lbs
OPERATING TEMPERATURE	From -40°C to 80°C From -40°F to 176°F
CABLE LENGTH	5m (P/N: AP5G4) or 10m (P/N: AP5G4-1)
CABLE TYPE	LMR195 white
MAST DIAMETER	25-66mm 0.98-2.60 inch

FREQUENCY BANDS

LTE / 4G

	1	2	3	4	5	7	8	
	9	10	12	13	14	17	18	
	19	20	22	25	26	27	28	
694 MHz	29	30	33	34	35	36	37	3800 MHz
	38	39	40	41	42	43	44	
	48	49	52	53	65	66	67	
	68	69	85	103	106			

5G

	n1	n2	n3	n5	n7	n8	n12	
	n13	n14	n18	n20	n25	n26	n28	
	n29	n30	n34	n38	n39	n40	n41	
694 MHz	n48	n53	n65	n66	n67	n78	n80	3800 MHz
	n81	n82	n83	n84	n85	n86	n89	
	n90	n95	n97	n98	n100	n101	n256	

COMPATIBLE ROUTERS


VARIANTS: AP5G4, AP5G4-1

TELTONIKA	CALYX, RUTC42, RUTC50, RUTM30, RUTM31, RUTM51, RUTM54, RUTM55, RUTM56, RUTM59, RUTX12, RUTX14, RUTX50, TRB500, TRB501
ROBUSTEL	EG5120, EG5200, R2000, R5010, R5020, R5020 Lite
CISCO	CG418-E, CG522-E
COMSET	CM550W, CM580W, CM685VX, CM770W-6, CM950W
CUDY	P5
DIGI	EX50, IX25, IX40, TX54 LTE-Advanced, TX64
ERICSSON (CRADLEPOINT)	E300, E3000, IBR1700, R1900, R2400, R980, W1850, W4005
FORTINET	FEX-311F, FEX-311F
FOUR-FAITH	5G Industrial CPE F-NR200, 5G Industrial Router F-NR100, 5G SIM WiFi Router F-NR120, 5G Smart Light Pole Gateway F-G300, 5G WiFi Router with SIM Card Slot F-NR130, Smart Light Pole Gateway F-G310
MILESIGHT	UF31, UR75
PEPLINK	Balance 310 5G, Balance 310 fiber 5G, BR1 Mini 5G, BR1 Pro (CAT-20), BR1 Pro CAT-20, BR2 PRO, MAX BR1 Pro 5G, MAX HD2, MAX HD2 Mini, MAX Transit, MAX Transit Duo Pro, UBR Plus
PERLE	IRG7440
PROROUTE	H685 WRT M2M 5G Router, H900 5G Router
ROBUSTEL	EG5120, EG5200, R2000, R5010, R5020, R5020 Lite


SEMTECH (SIERRA WIRELESS)	AirLink MG90 5G, AirLink XR60
SIEMENS	6GK5853-2EA00-2DA1
TELTONIKA	CALYX, RUTC42, RUTC50, RUTM30, RUTM31, RUTM51, RUTM54, RUTM55, RUTM56, RUTM59, RUTX12, RUTX14, RUTX50, TRB500, TRB501
WAVETEL	W4600-NR 5G, W4A00 5G, WNR320 5G, WNR340 5G
WLINK	G230, G530, G530
ZYXEL	Nebula FWA510
OTHER	4 * SMA

PLOTS



VSWR 

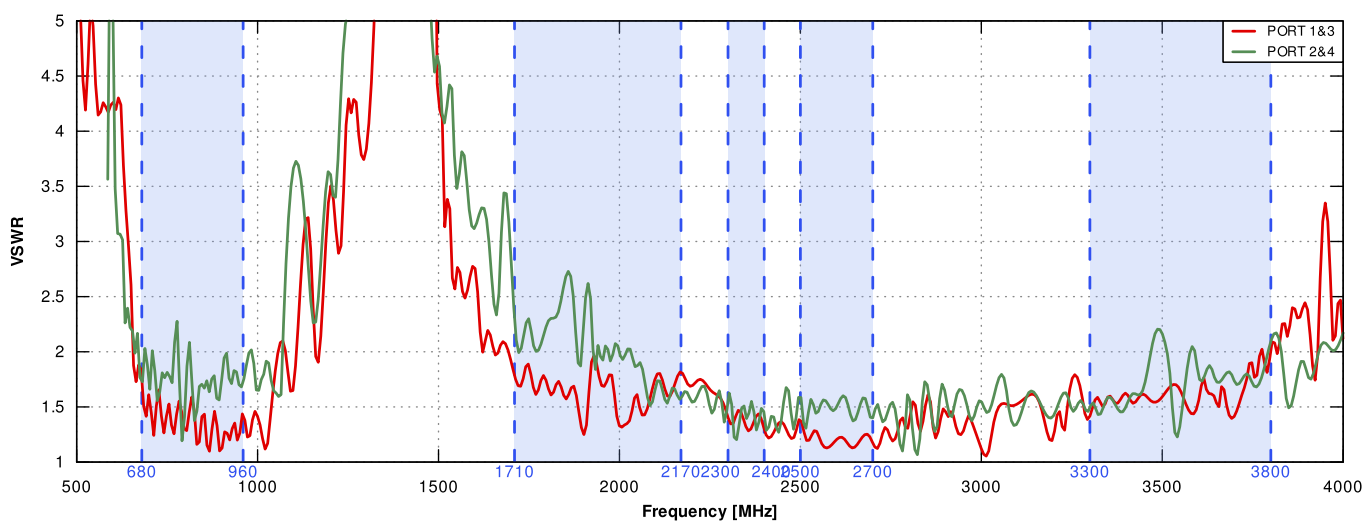



Gain

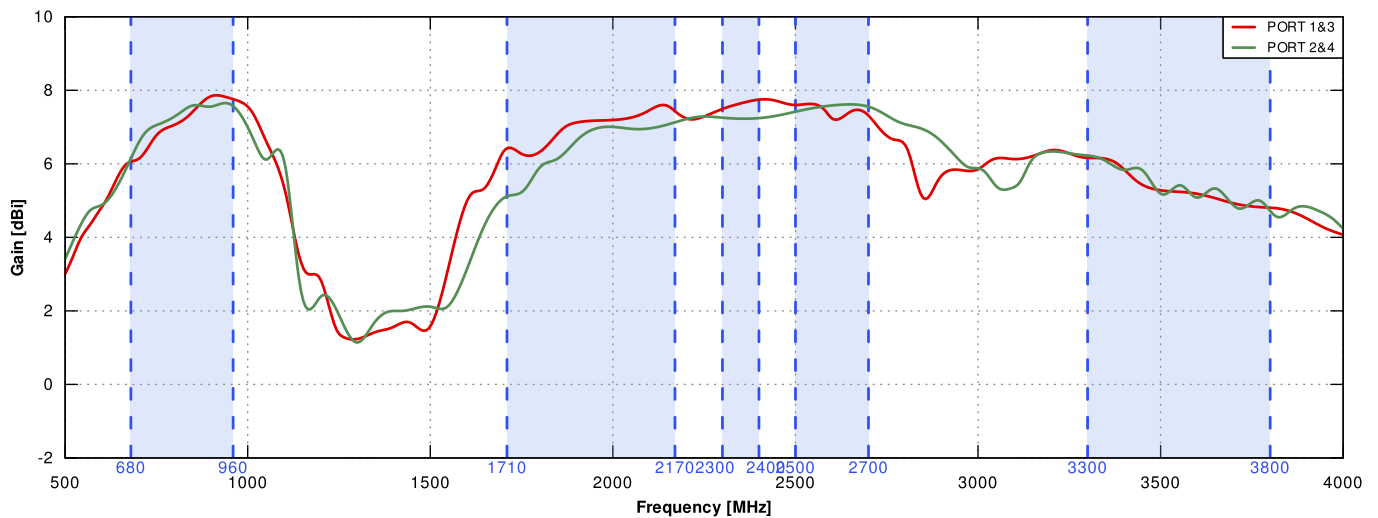



Port 1&3 700MHz to 900MHz

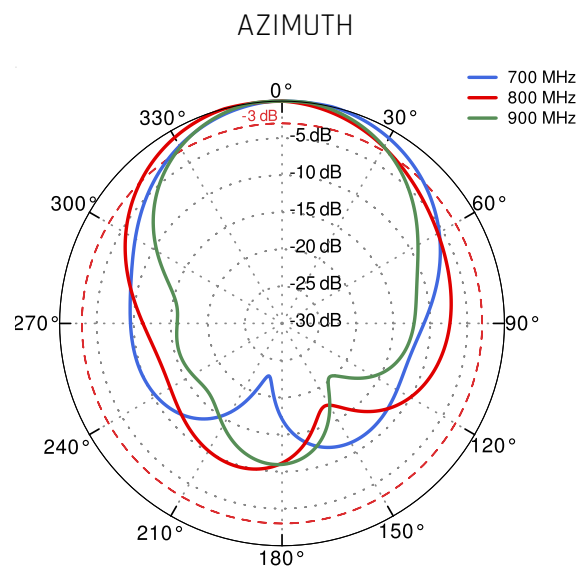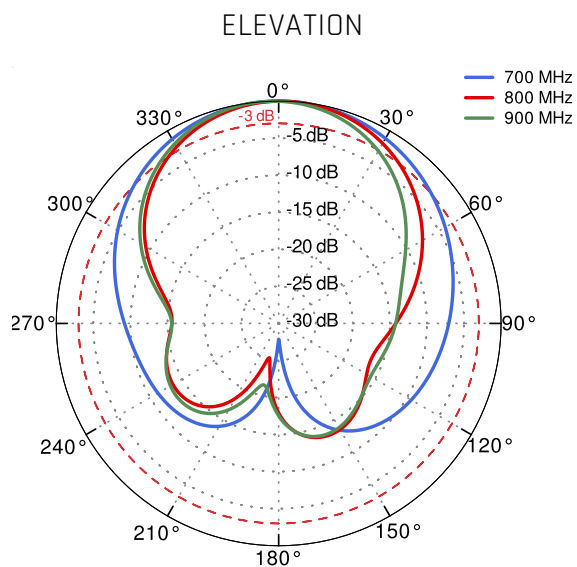



Port 1&3 1.71GHz to 2.17GHz

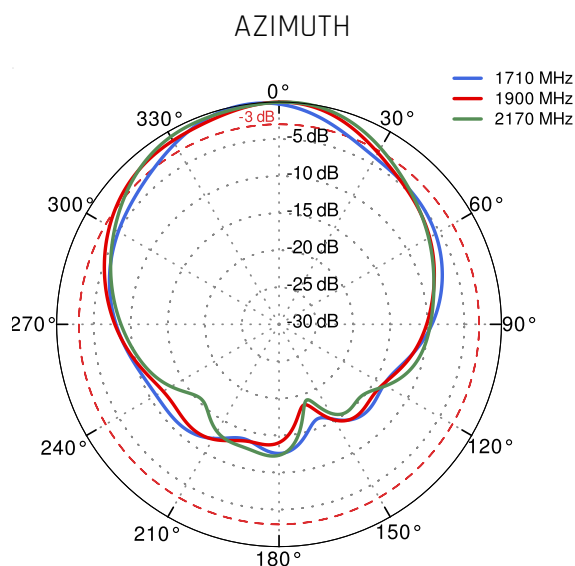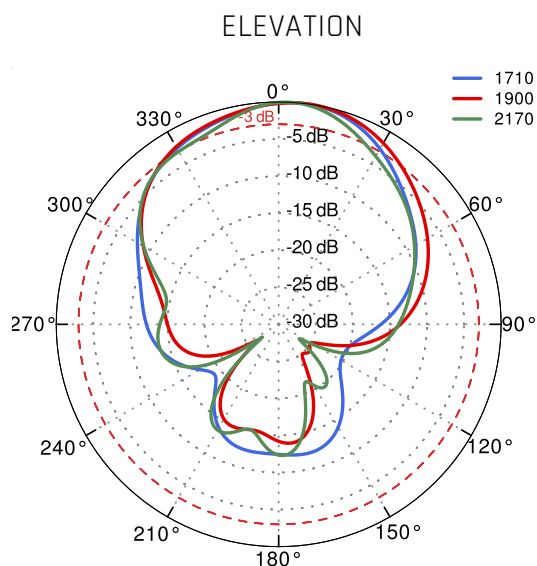



Port 1&3 2.3GHz to 2.7GHz

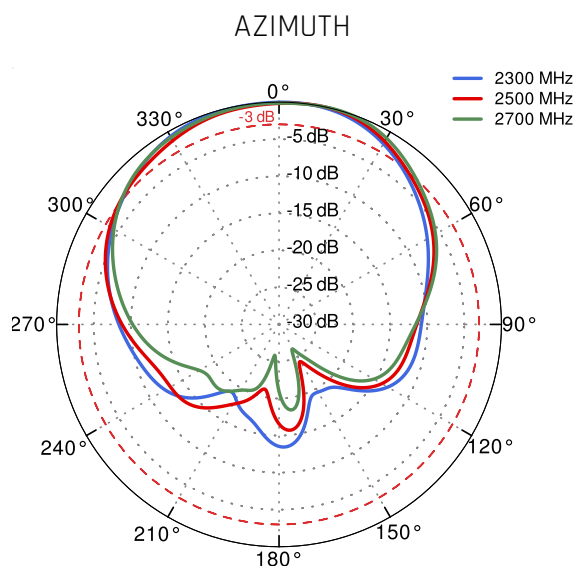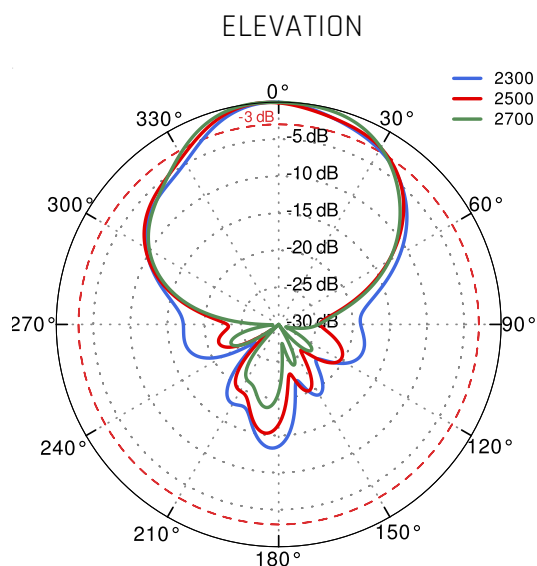



Port 1&3 3.3GHz to 3.8GHz

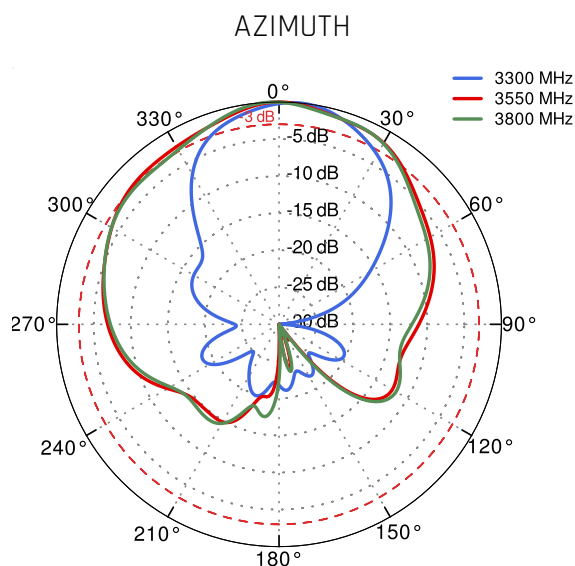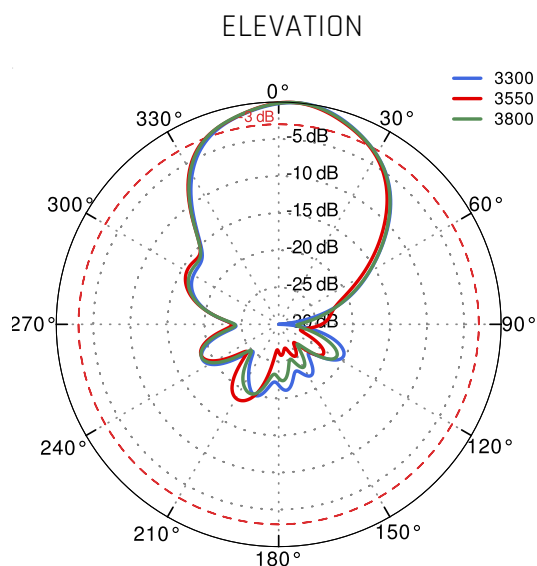



Port 2&4 700MHz to 900MHz

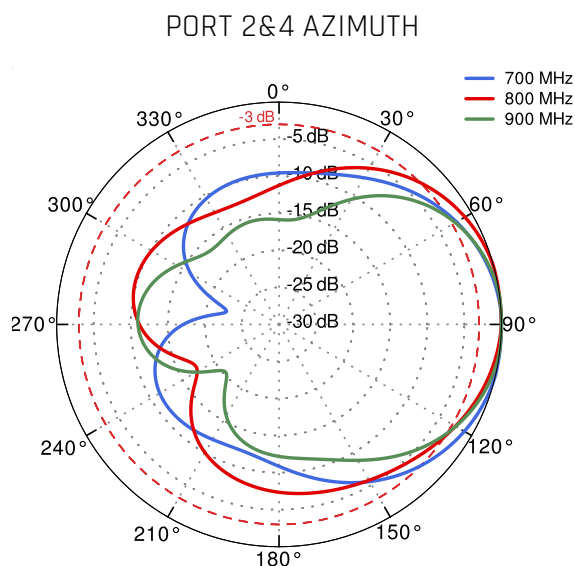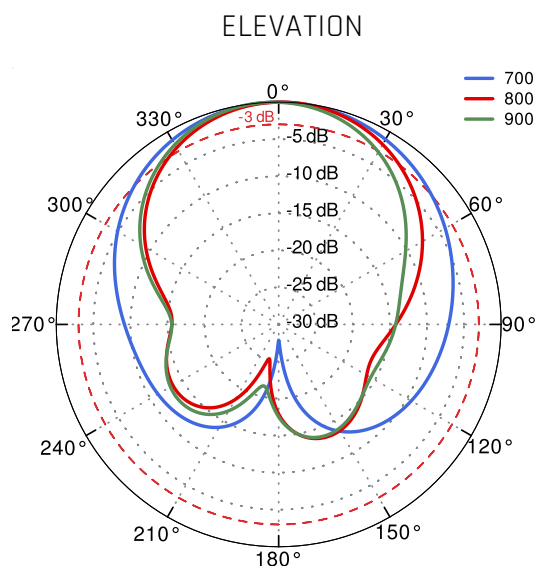


Port 2&4 1.71GHz to 2.17GHz

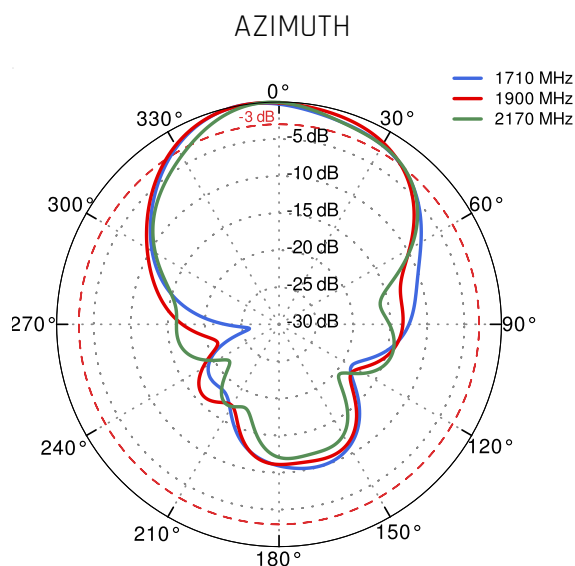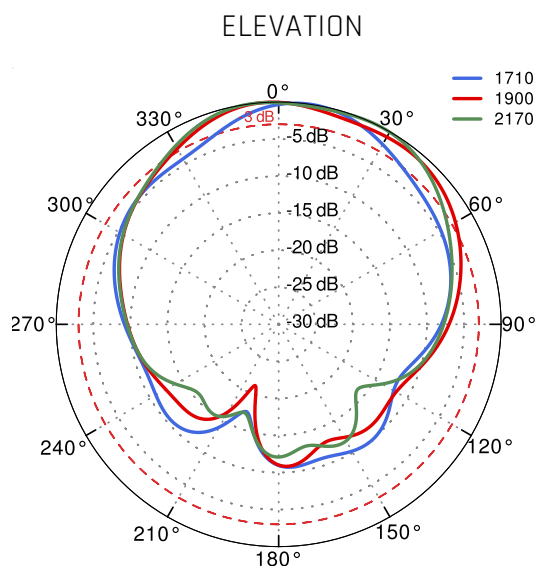

Port 2&4 2.3GHz to 2.7GHz

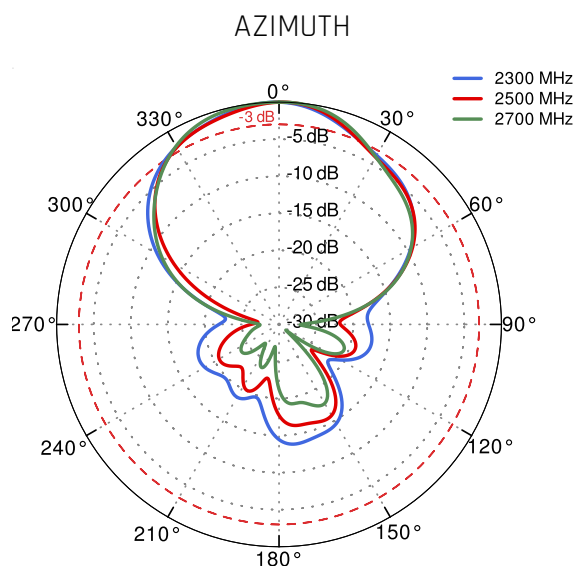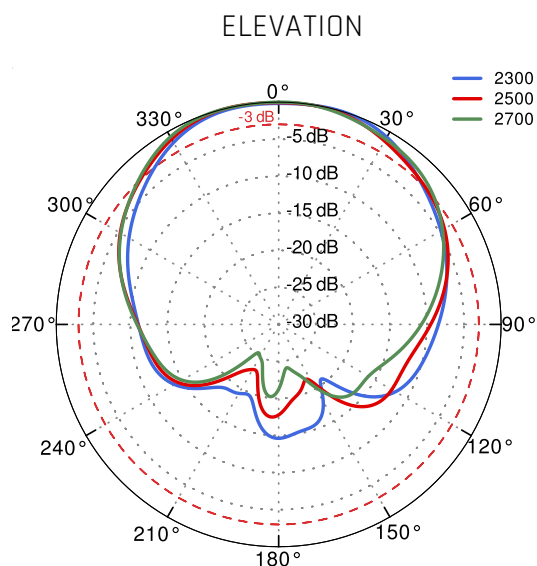

Port 2&4 3.3GHz to 3.8GHz

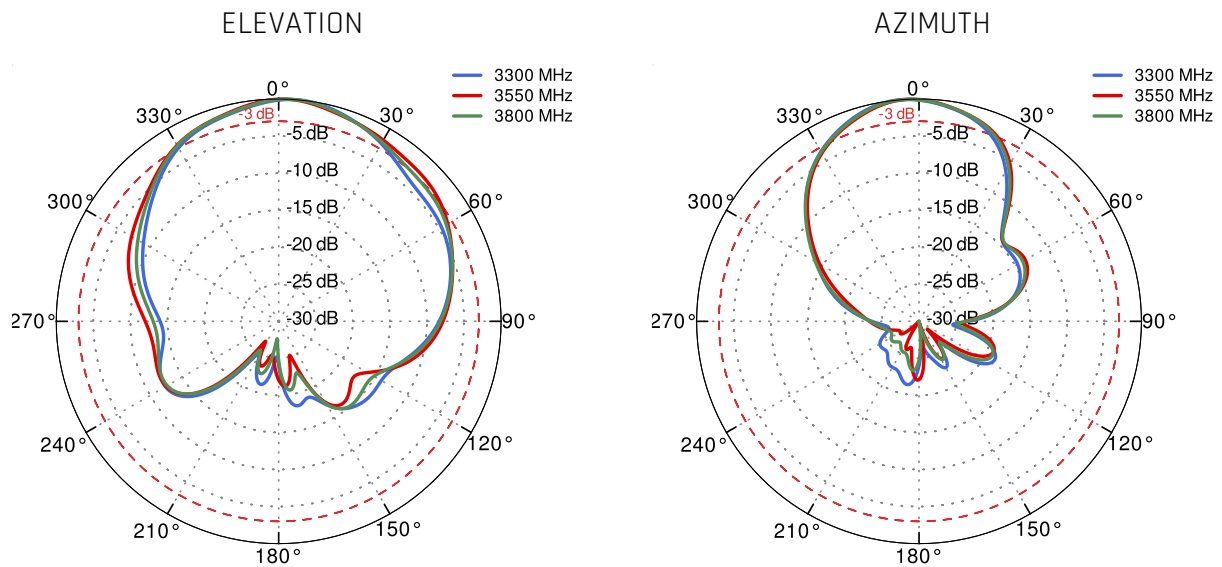

DIMENSIONS

